


FKF 200 Optimat – even more surface and material variety

The preconfigured entry-level solution for single-sided laminating and for the production of compound and lightweight panels can be ideally adapted to your requirements by numerous new options. All in all the FKF 200 is appropriate for the flexible and economical processing of many different materials.

In continuous process the FKF 200 processes material on coils, high gloss veneer sheets and rigid covering layer

material such as HDF. With the special quick change system the adhesive application roller can be easily and quickly changed. The dosing roller speed and temperature is steplessly adjustable. By means of the pressure zone lying below the pressing force can be ideally adapted. The spacious lay-up zone offers comfortably place for optional additional elements, such as the storage shelf.

FKF 200 – Laminating / Production of compound panels

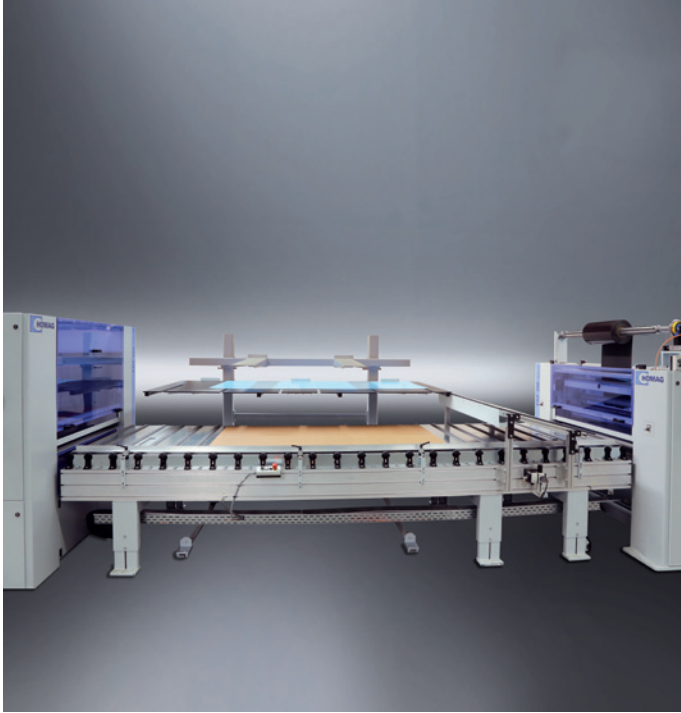

Option: storage shelf with equipment for veneer sheets



Laminating calender with unwinding station

Equipment basic machine

- Roller conveyor with 3 m length
- Glue application unit
- Lay-up roller conveyor with 5 m length
- Laminating calender
- Outfeed roller conveyor

Options

- Unwinding station
- Equipment for veneer sheets (high gloss and HPL)
- Storage shelf with equipment for veneer sheets
- Premelter
- Workpiece cleaning with rotating or sword brush
- Workpiece pre-heating
- Glue application control (UV lamp)

Technical data FKF 200/13/WH/F

Feed/processing speed	15 m/min
Workpiece width	200–1 300 mm
Workpiece length	1 200–3 000 mm optional 600–3 000 mm
Workpiece thickness	8–80 mm optional 3–80 mm
Applicable adhesives	PUR
Processible laminating materials	Material on coil Veneer sheets
Heating output	9 kW
Working height	950 mm



HOMAG Holzbearbeitungssysteme GmbH

Homagstrasse 3–5
72296 SCHOPFLOCH
GERMANY
Tel. +49 7443 13-0
Fax +49 7443 13-2300
info@homag.de
www.homag.com

Content, technical data and pictures are not binding in every detail.
We reserve the right to make changes.